

## Cotech Solar Polycrystalline Silicon Modules CS6P20-200-250W

### Features

- ❖ Low voltage-temperature coefficient allows higher power output at high-temperature condition.
- ❖ High conversion efficiency, High reliability with guaranteed  $\pm 3\%$  power output tolerance, ensuring return on investment
- ❖ Withstands high wind-pressure and snow load (passed IEC 5400Pa mechanical loading test), and extreme temperature variation.
- ❖ Custom design with wide power selection down to 5W



### Quality and Safety

- ❖ 5 years workmanship warranty, 12 years 90% power output, 25 years 80% power output
- ❖ Rigorous quality control meeting the highest international standards ISO 9001:2000 and ISO 14001:2004 certified factories manufacturing world class products
- ❖ CE, IEC61215, IEC61730, TUV, VDE and UL1703

### Materials

- ❖ Advanced EVA encapsulation system with triple-layer back sheet meets the most stringent safety requirements for high-voltage operation
- ❖ The sturdy, anodized aluminum frame allows the modules to be mounted on a variety of standard racking systems and to withstand harshest conditions
- ❖ Ultra reliable bypass diodes prevent damage through overheating due to shaded or defective cells
- ❖ Innovative, environmentally friendly packing method using pile-edges ensures modules arrive in perfect condition
- ❖ New frame design incorporating drainage holes, with more grounding holes, provide flexible installation and use

CS6P20-200 CS6P20-210  
CS6P20-220 CS6P20-230  
CS6P20-240 CS6P20-250

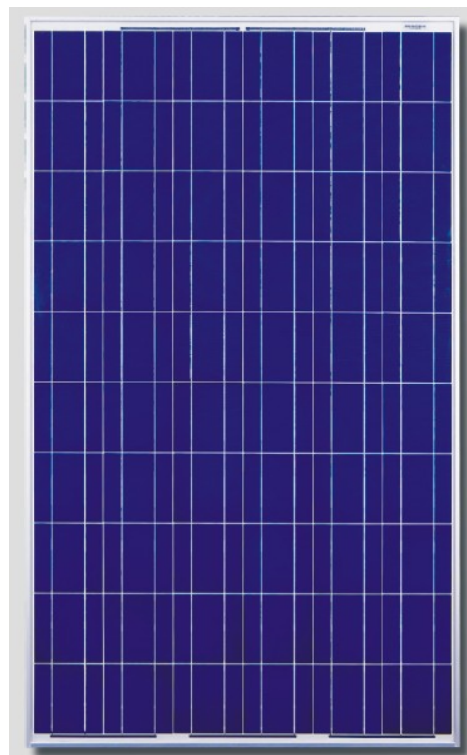

**COTECH SOLAR GROUP LIMITED**

No. 580, Zhengli Rd, Yangpu District, Shanghai, China

TEL: 0086-21-55665687 FAX: 0086-21-55665634


WEBSITE: [www.cotechsolar.com](http://www.cotechsolar.com) EMAIL: [info@cotechsolar.com](mailto:info@cotechsolar.com)

### Electrical Characteristics


Type	CS6P20- 200	CS6P20-210	CS6P20-220	CS6P20-230	CS6P20-240	CS6P20-250
Nominal Maximum Power (Pmax)	200W	210W	220W	230W	240W	250W
Optimum Operating Voltage (Vmp)	28.9V	28.9V	29.3V	29.8V	30.4V	30.6V
Optimum Operating Current (Imp)	6.93A	7.26A	7.52A	7.71A	7.91A	8.17A
Open Circuit Voltage (Voc)	36.2V	36.4V	36.6V	36.8V	37.0V	37.3V
Short Circuit (Isc)	7.68A	7.91A	8.09A	8.34A	8.61A	8.97A
Maximum Series Fuse Rating	15A					
Dimensions	1636×992×45mm/ 1650×992×46mm					
Weight	19.5kg					
Operating Temperature	-40 ℃ ~+85 ℃					
Maximum System Voltage	1,000V (IEC) /600V (UL)					
Power Tolerance	±3%					
Temp. Coeff. of Pmax (TK Pmax)	-0.45℃					
Temp. Coeff. of Voc (TK Voc)	-0.35 %/℃					
Temp. Coeff. of Isc (TK Isc)	0.060 %/℃					
Nominal Operating Cell Temp.	45℃					
Cell Type and Arrangement	Polycrystalline Silicon, 156mm x 156mm, 60pcs(6x10) in series					
Glass ,Type and Thickness	High Transmission ,Low Iron, Tempered Glass 3.2mm					

Under Standard Test Conditions (STC) of irradiance of 1000W/m2, spectrum AM 1.5 and cell temperature of 25

### Module Diagram

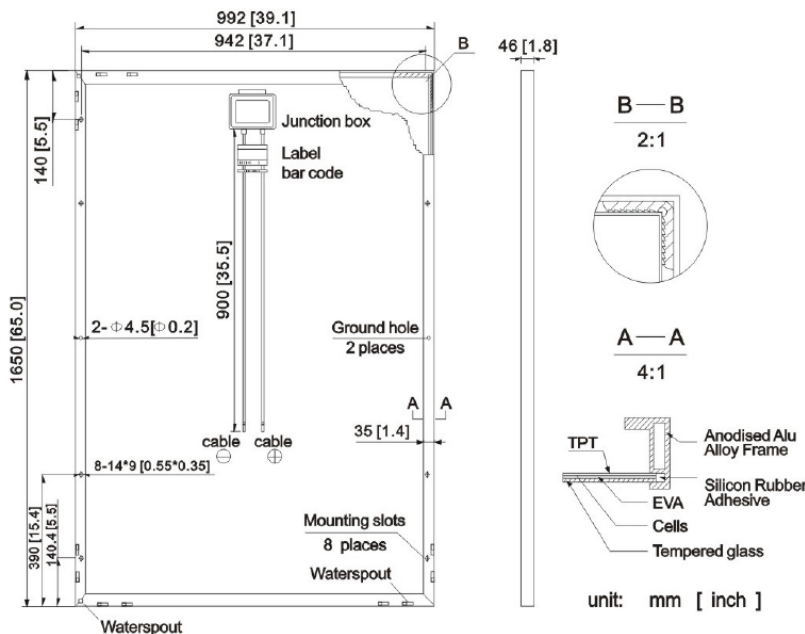

### I-V Curves-CS6P200-210W

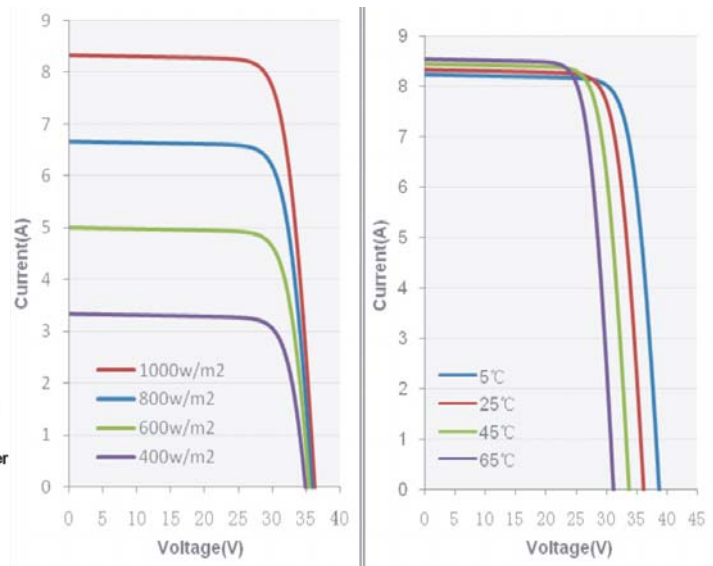

### Brief Introduction

Cotech Solar is one of the few large-scale solar companies in China, designs, manufactures and sells solar modules and designs, assembles, sells and installs solar systems. The annual production capability of solar modules is more than 120MW and have passed UL,TUV, IEC, VDE and CE certification.